



MACHINING FORM


2077 MAIN STREET P.O. BOX 528 LYNDEN, WA 98264
 PH (360)354.5676 FAX (360)318-8687

DOOR STYLE _____
 DOOR SIZE _____
 CUSTOMER _____
 P. O. NUMBER _____

RATING 20min 45min 60min 90min
 _____ 1 _____ OF _____ 1
 DATE _____
 DRAWN BY _____

Note: Any and all changes must be submitted to Lynden Door in writing. No verbal changes will be accepted. Accuracy of information is the responsibility of the customer.

HINGE

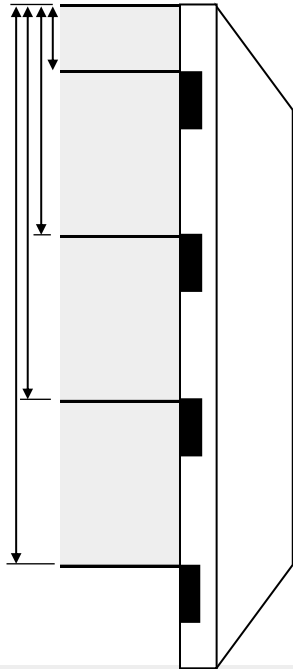

HINGES


SIZE _____
 BACKSET _____
 THICKNESS _____
 PIVOT _____
 TEMPLATE NO. _____

HINGE CORNERS

- 1/4" Radius
- 5/8" Radius
- Square


3 degree BEVELS

- Lock Edge
- Hinge Edge



NOTE: WHEN WIRE CHASE IS REQUIRED, DESIGNATE HINGE TO RECEIVE WIRE WITH AN "X"

ACTIVE

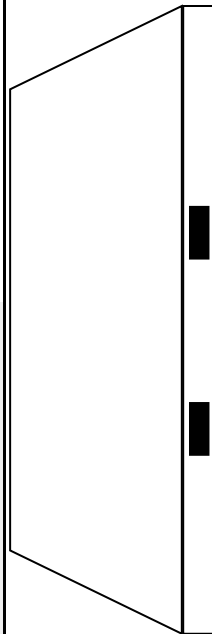

LOCKS / EXIT DEVICES

BORED LOCK	DEAD LOCK
FACE BORE _____	_____
BOLT BORE _____	_____
BACKSET _____	_____
F-P THICKNESS _____	_____
F-PLATE WIDTH _____	_____
F-P HEIGHT _____	_____

C-L DEAD LOCK

C-L LOCK FRONT

CORNERS

- 1/4" Radius
- Square

MORTISE LOCK _____
 CARD LOCK _____
 EXIT DEVICE _____

MANUFACTURER _____
 TEMPLATE NO. _____
 FUNCTION NO. _____

NOTE: * EXIT DEVICE BACK-SET SHALL BE GIVEN AS THE DISTANCE FROM C-L OF DEVICE TO C-L OF DOOR THICKNESS AT LOCK STILE UNLESS OTHERWISE NOTED.

INACTIVE

STRIKES

- 1-1/4 X 4-7/8" ASA
- 1-1/8 X 2-3/4" LIP
- 1-1/8 X 2-3/4" D-BOLT

DUSTBOX


OTHER _____
 MFG. _____
 TEMP. _____

FLUSH BOLTS

MFG. _____
 TEMP. NO. _____
 CORNER PRE _____

3 degree BEVELS

- Lock Edge
- Hinge Edge

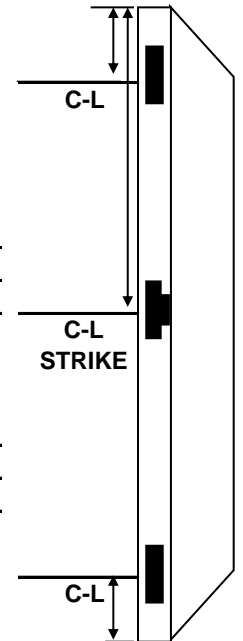

LIABILITY FOR MACHINING ACCURACY WILL BE ASSUMED ONLY UPON RECEIPT OF TEMPLATE, COMPLETED LYNDEN DOOR DETAIL SHEETS AND PHYSICAL SAMPLES AS REQUIRED.

SPEC. NO.

SPEC. NO.